

**General Data**

Model:	GT 50/2/125 C.155
Code:	2000052
Series:	G2
Weight [Kg]	39.50

Submersible eletropumps for sewage with an inbuilt macerator in the inlet

**Hydraulic**

Impeller Type:	Grinder
Delivery DN [mm]:	G 2" DN32 PN6
Input DN [mm]:	-
Free Passage [mm]:	-
Impeller Ø [mm]:	148
Max Pump Efficiency [%]:	23.10
Global Efficiency [%]:	17.8
Head [m]:	16.26
Flow [m <sup>3</sup> /h]:	10.35

Tolerance according to ISO 9906:2012 3B2



Attention: pictures for illustrative purposes

**Features**

Upper Meccanical seal:	CA/CE/Viton
Lower Meccanical Seal:	SIC/SIC/Viton
Upper Bearing:	Single raw ball bearing
Lower Bearing:	Double raw ball bearing
IP Protection:	IP68
Motor protection:	present
Humidity sensor:	present
ATEX:	not present
Applied Paint:	Two component water-based paint
Cable Length [m]:	10
Lubricating Oil:	Q8 WF15
Oil Quantity [Kg]:	0.60

**Materials**




Pump:	Cast Iron EN 1561 EN-GJL-250
Impeller:	Cast iron EN 1561 EN-GJL-250
Motor shaft:	Stainless steel AISI 420
Cooling Jacket:	Not available
Screw:	Stainless steel A2-70
Cable:	H07RN8F

**Pumped Liquid**

Pumped Liquid:	Light and lightly sewage
Density [Kg/dm <sup>3</sup> ]:	1.1
pH:	6-10
Temperature Range:	0-40°C


**Installation**

Maximum depth of immersion [m]:	20
Cooling Type:	The cooling of the motor is ensured by the surrounding liquid
Installation:	Vertical
Floating on board machine:	not present

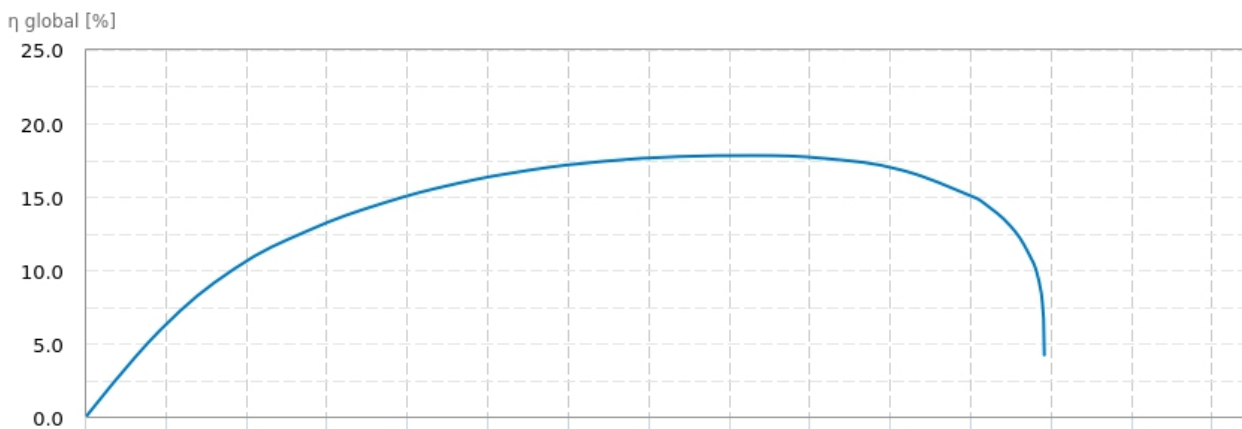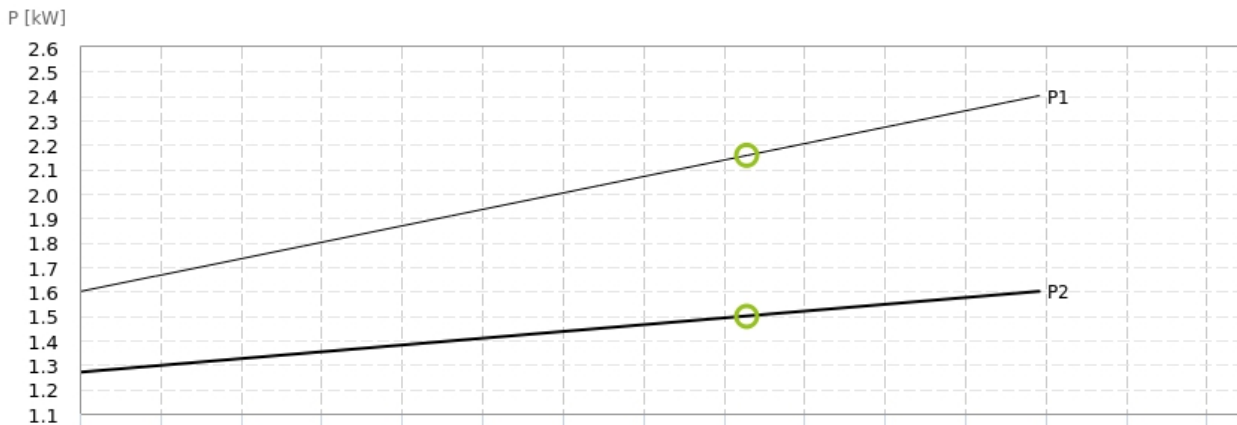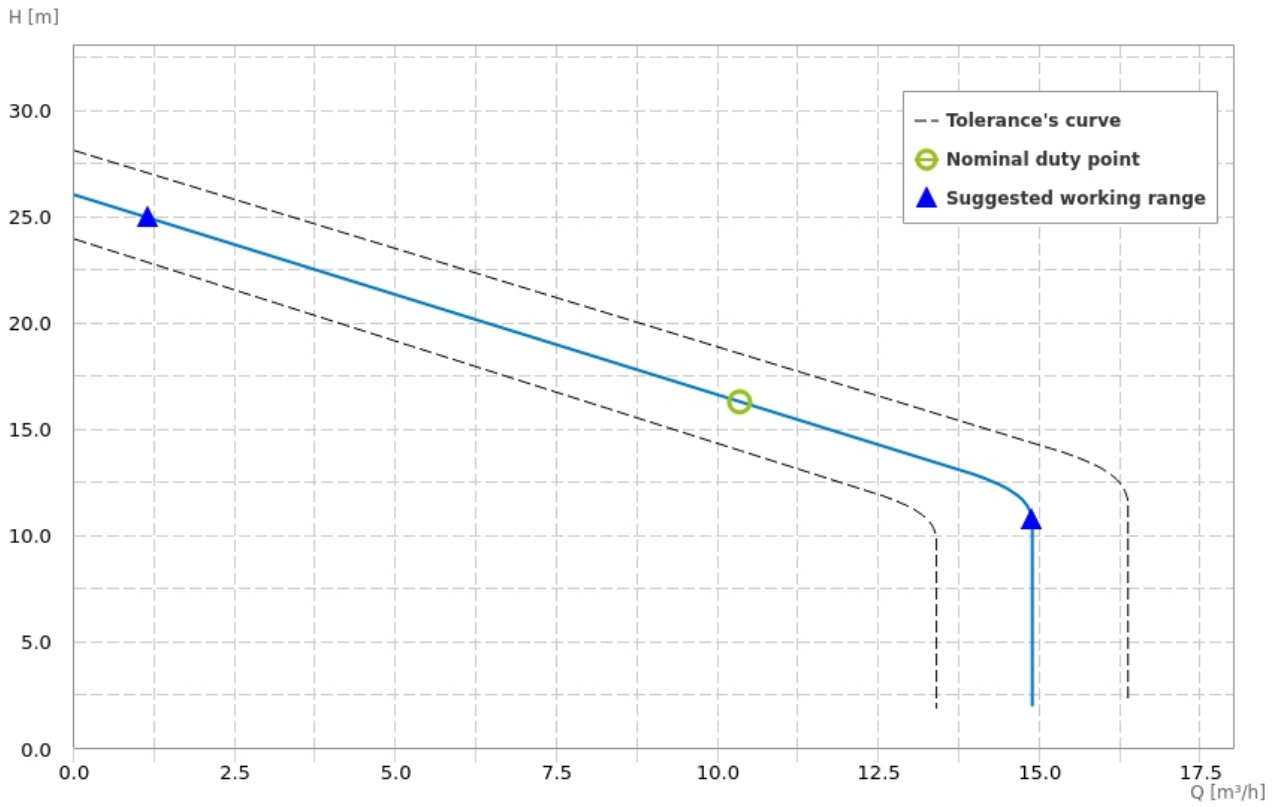

**Motor**

Motor code:	3520340210
Power P1 [kW]:	2.40
Power P2 [kW]:	1.60
Phases:	3
Frequency [Hz]:	50
Tension [V]:	400
Nominal current [A]:	3.7
Starting current [%]:	581.0
Power Factor:	0.79
R.P.M.:	2850
Starting:	D.O.L
Capacitor [ $\mu$ F]:	-
Insulation Class:	F 155°C
Service type:	S2
Max Efficiency [%]:	74.60
Max Efficiency at full load [%]:	74.6
Efficiency at $\frac{3}{4}$ load [%]:	74.2
Efficiency at $\frac{1}{2}$ load [%]:	74.6
Efficiency class:	-

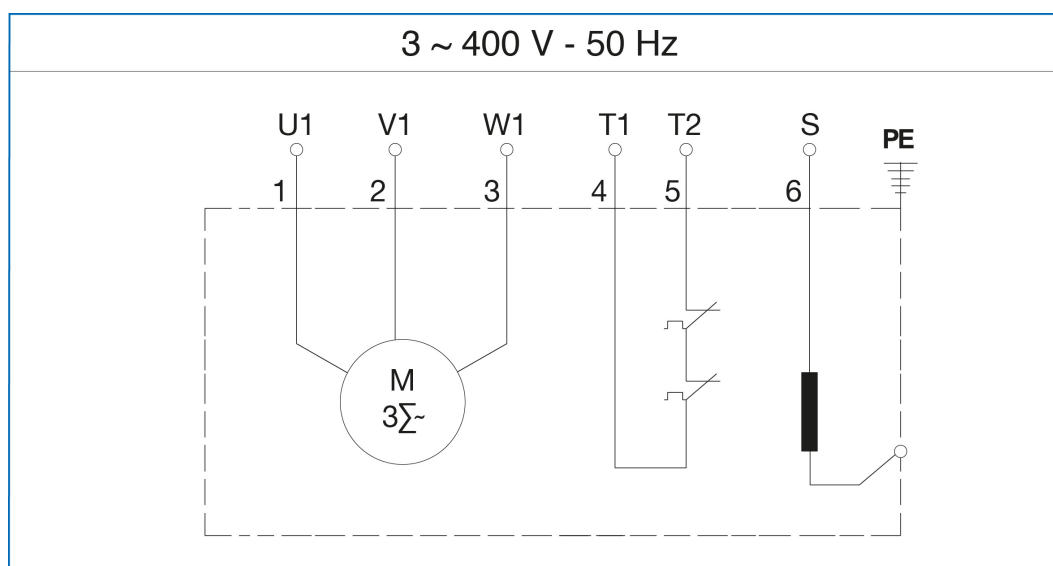**Wiring diagrams**

Dimensions drawing

